


GX9.5 Base 寸法 (mm) 品名 ANSI 定格電圧 (V) 消費電力 (W) A(Max.) B(Max.) 色温度(K)参考値 定格寿命(h) フィラメントタイプ Fig.No. С 全光束 (lm) JS 100V 1000W C/T CC-8 JS 100V 1000W B/T CC-8 JS 100V 1000W B/U 63.5 C-13 JSH 100V 1000W B C-13 JS 100V 1000W B/S2 C-13D 

(	GX16 Base					寸法 (mm)						
	品名	ANSI	定格電圧(V)	消費電力 (W)	A(Max.)	B(Max.)	С	全光束 (lm)	色温度 (K) 参考値	定格寿命(h)	フィラメントタイプ	Fig.No.
	JS 100V 1000W B/M		100	1000	30	140	85	23000	3050	500	C-13	5
	JS 100V 1000W C/M		100	1000	30	140	85	27000	3200	200	C-13	5
	JS 100V 1000W B/MP		100	1000	30	140	85	21000	3050	500	C-13	6
	JS 100V 1000W C/MP		100	1000	30	140	85	24000	3200	200	C-13	6
	JS 100V 1000W G/D		100	1000	25	140	85	23300	3125	500	C-13D	7
*	JS 100V 1500W B/M		100	1500	35	140	85	34500	3050	500	C-13	5
*	JS 100V 1500W C/M		100	1500	35	140	85	42000	3200	200	C-13	5
*	JS 100V 1500W B/MP		100	1500	35	140	85	29500	3050	500	C-13	6
*	IS 100V 1500W C/MP		100	1500	35	140	85	35500	3200	200	C-13	6

C-13D

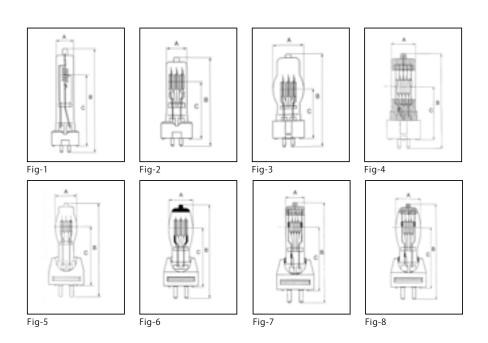


<sup>:</sup> JS 100V 1500W G/D \* 印製品はロット受注生産品です。



(	G22 Base					寸法 (mm)						
	品名	ANSI	定格電圧(V)	消費電力 (W)	A(Max.)	B(Max.)	С	全光束 (lm)	色温度 (K) 参考値	定格寿命(h)	フィラメントタイプ	Fig.No.
*	JS 100V 1000W C/S1		100	1000	34	127	63.5	27000	3200	200	C-13	9
	JS 100V 1000W B/S		100	1000	34	135	75	23000	3050	500	C-13	9
ſ	JS 100V 1000W C/S		100	1000	34	135	75	27000	3200	200	C-13	9
*	JS 100V 1500W B/S		100	1500	40	150	75	34500	3050	500	C-13	9
*	JS 100V 1500W C/S		100	1500	40	150	75	42000	3200	200	C-13	9
*	JS 100V 2000W B/S		100	2000	39	176.5	90	48000	3050	500	C-13	11
	JS 100V 1000W BP/2		100	1000	25	150	70	21000	3050	500	C-13D	13
*	JS 100V 1500W BP/2		100	1500	25	150	70	30000	3050	500	C-13D	14
*	JS 100V 1500W CP/2		100	1500	25	150	70	35000	3200	200	C-13D	14

E39 Base					寸法 (mm)						
品名	ANSI	定格電圧(V)	消費電力 (W)	A(Max.)	B(Max.)	С	全光束 (lm)	色温度 (K) 参考値	定格寿命(h)	フィラメントタイプ	Fig.No.
JS 100V 1000W B/E		100	1000	30	145	105	23000	3050	500	C-13	15
JS 100V 1000W C/E		100	1000	30	145	105	27000	3200	200	C-13	15
JS/S 100V 1000W C/S 💥		100	1000	48	225	175	22000	3200	200	C-7A	16
JS/S 100V 1000W C/L ※		100	1000	48	300	255	22000	3200	200	C-7A	17
JS/SD 100V 1000W B ※		100	1000	165	360	252.5	22000	3050	400	C-7A	18
JS/SD 100V 1000W C ※		100	1000	165	360	252.5	26000	3200	200	C-7A	18
JS/SR 100V 1000W C		100	1000	165	360	252.5	26000	3200	200	C-7A	19
JS 100V 1500W B/E		100	1500	35	145	105	34500	3050	500	C-13	15

<sup>\*</sup>フロストバルブ
\* 印製品はロット受注生産品です。

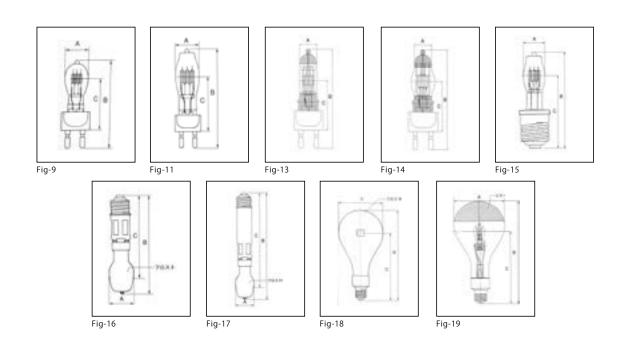



	G38 Base					寸法 (mm)						
	品名	ANSI	定格電圧(V)	消費電力 (W)	A(Max.)	B(Max.)	С	全光束 (lm)	色温度 (K) 参考値	定格寿命(h)	フィラメントタイプ	Fig.No.
*	JS 120V 1000W C/L	CYV	120	1000	22	197	127	27500	3200	200	C-13D	20
*	JS 100V 1500W C/L		100	1500	35	197	127	42000	3200	200	C-13	20
*	JS 100V 1500W B/L		100	1500	35	197	127	34500	3050	500	C-13	20
*	JS 120V 1500W C/L	CXZ	120	1500	35	203.2	127	38500	3200	300	C-13D	20
	JS 100V 2000W B/L		100	2000	45	210	127	48000	3050	500	C-13	20
	JS 100V 2000W C/L		100	2000	45	210	127	58000	3200	200	C-13	20
*	JS 120V 2000W	CYX	120	2000	45	215.9	127	59000	3200	250	C-13	20
*	JS 220V 2000W		220	2000	45	215.9	127	52000	3200	300	C-13	20
*	JS 240V 2000W		240	2000	45	215.9	127	52000	3200	300	C-13	20
*	JS 100V 3000W B/M		100	3000	50	210	127	69000	3050	500	C-13	20
	JS 100V 3000W C/M		100	3000	50	210	127	78000	3200	200	C-13	20
*	JS 120V 3000W C/M		120	3000	50	210	127	78000	3200	300	C-13	20
*	JS 220V 3000W C/M		220	3000	50	220	127	78000	3200	300	C-13	20
	JS 100V 5000W B		100	5000	60	268	165	115000	3050	600	C-13	21
	JS 100V 5000W C		100	5000	60	268	165	145000	3200	500	C-13	21
*	DPY 120V 5000W	DPY	120	5000	60	268	165	140000	3200	500	C-13	21
*	JS 220V 5000W		220	5000	60	268	165	135000	3200	400	C-13	21
	JS 100V 10000W C		100	10000	80	400	254	290000	3200	300	C-13	22
*	DTY 120V 10000W	DTY	120	10000	80	400	254	285000	3200	300	C-13	22
*	JS 220V 10000W		220	10000	80	400	254	285000	3200	300	C-13	23
*	JS 240V 10000W		240	10000	80	400	254	285000	3200	300	C-13	23
*	JS 200V 20000W C		200	20000	130	560	354	580000	3250	300	C-13	24
*	JS 200V 24000W C		200	24000	130	560	354	696000	3250	300	C-13	24

<sup>\*</sup> 印製品はロット受注生産品です。

